


REV	ECN.NO:	BY	DATE
A01	NEW DRAWING	Tonghuaili	15.08.14


Conn. 1

TYPE C/M
INS:BLACK

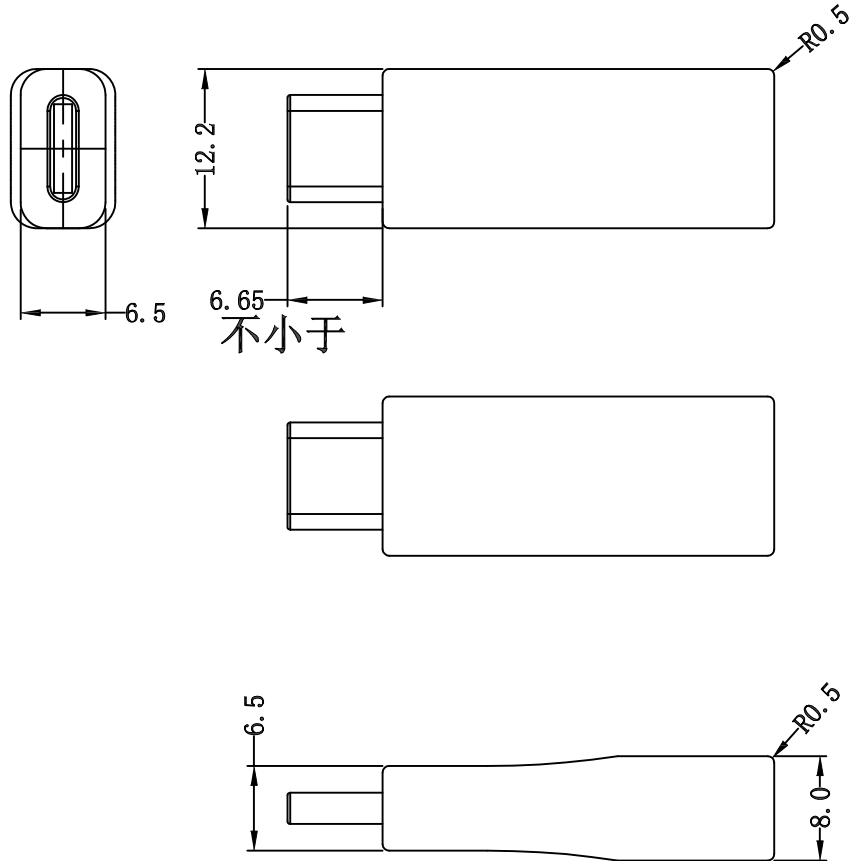

Conn. 2

USB2.0 MICRO B/F
INS:BLACK



NOTE:

1. CM-M2F V1.0 PCB带电阻(阻值=10K)
2. CONNECTOR:
 - a. Conn. 1:USB3.1 TYPE C/M 夹板式黑胶, 不锈钢镀镍, 端子镀金15u".
 - b. Conn. 2:Micro-USB 5p B/F 插板式, 黑胶, 不锈钢镀镍, 端子镀金1U".
3. Micro-USB 5p B/F 插板式, 黑色护套.
4. HOOD:Conn. 1&Conn. 2 成型45P PVC 黑色外模料.
5. ELECTRICLE TEST:
 - <1> INSULATION RESISTANCE 10M Ohms MIN .
 - <2> HIGH PRESSURE DC300V/0.01S.
 - <3> ON-RESISTANCE 2M Ohms MIN.
6. PACKING:
 1. PE BAG OR CUSTOMIZED

COPLIANCE WITH THE REQUIEMENT RoHS HF SONY00259 OTHER
 ※ NO USING RESTRICTED AND BANNED SUBSTANCE

CUSTOMER DRAWING				LITE Liteconn Co.,Ltd.				
-TOLERANCES- UNLESS OTHERWISE SPECIFIED						TITLE: Micro USB2.0 TO USB C. TYPE PLUG(蝴蝶扣)		
X.X	±0.35	X.X*	±3'	APPD:	DWG NO: 470301-001-0C			
X.XX	±0.25	X.XX*	±2'	CHECK:	DATE	SCALE	UNIT	PAGE
X.XXX	±0.15	X.XXX*	±1'	DRAW: Tonghuaili	2015.08.14	1:1	MM	1/1