
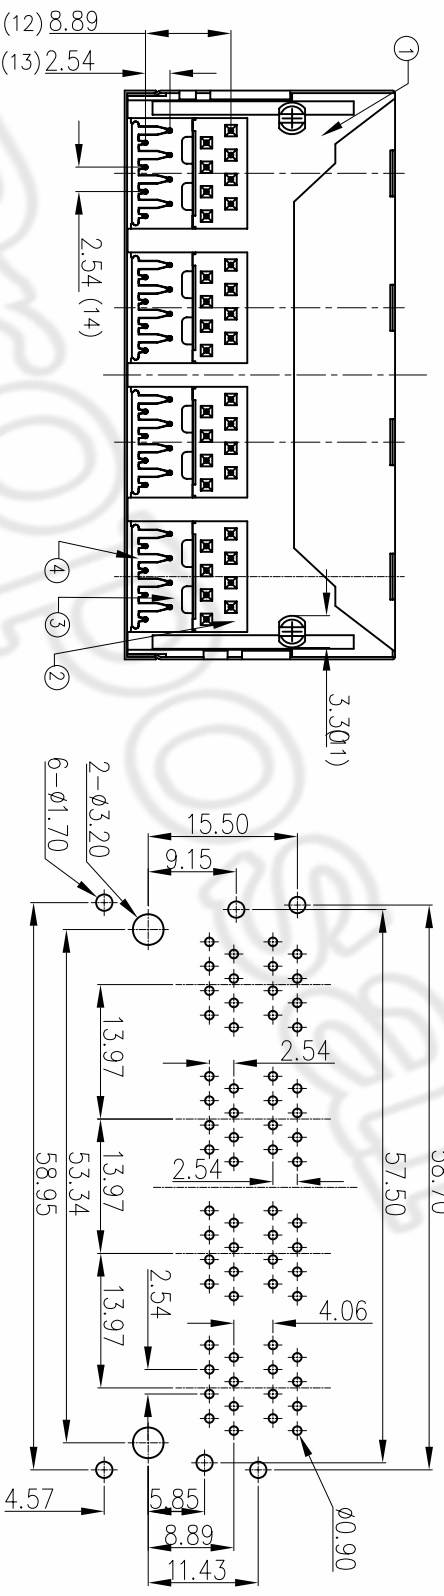
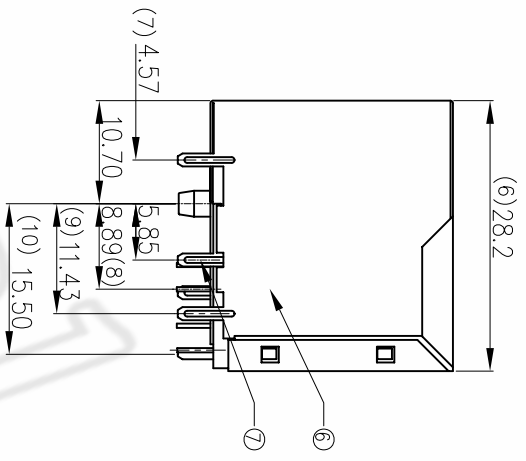


REV	ECONO.:	BY	DATE
A0	NEW DWG	葦芳	10.10.11
A1	調整比例	葦芳	11.08.12

NOTES:

- MATERIAL:
  - HOUSING & COVER: HIGH TEMPERATURE THERMOPLASTIC WITH 30% G.F. UL94 V-0; COLOR: SEE NOTES 6
  - CONTACT: COPPER ALLOY;  $\phi 0.45\text{mm}$
  - SHELL: COPPER ALLOY
  - GROUND TERMINAL: COPPER ALLOY
- FINISH:
  - CONTACT: GOLD PLATING(SEE TABLE)
  - SHELL: 1.27 $\mu\text{m}$  [50u"] MIN. NICKEL UNDERPLATED OVERALL.
  - GROUND TERMINAL: 2.54 $\mu\text{m}$  [100u"] MIN. TIN PLATED ON SOLDER TAIL AREA 1.27 $\mu\text{m}$  [50u"] MIN. NICKEL UNDERPLATED OVERALL
- RECOMMENDED P.C.B THICKNESS : 1.6mm
- OTHER GENERAL SPEC. TO REFER : RJ45 SERIES SPEC.
- FOR WAVE SOLDERING LEAD-FREE PROCESS
- 10124-01226031-X X X X X

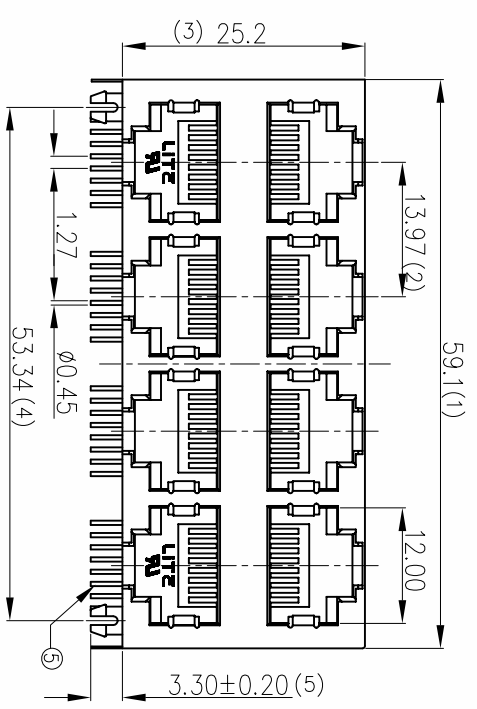

NO.	DESCRIPTION	MATERIAL	COLOR	REMARK
7	GROUND TERMINAL	SEE PART DRAWING		TIN PLATED
6	SHELL	SEE PART DRAWING		NI PLATED
5	CONTACT	SEE PART DRAWING		GOLD PLATED
4	COVER	SEE PART DRAWING		UL 94V-0
3	COVER	SEE PART DRAWING		UL 94V-0
2	COVER	SEE PART DRAWING		UL 94V-0
1	HOUSING	SEE PART DRAWING		UL 94V-0

**Lite** Litecomm Co., Ltd.

TITLE: RJ45圓針PORT口下蓋全包2X4PORT  
8P8腳註3.6鐵腳無彈片腳距4.57

APPD:	CHECK:	DWG NO.:	DATE	SCALE	UNIT	PAGE
X.X	X.XX	10124-01226031-XXXX	2010.10.11	1:1	MM	1/1

NO.	PART NO.	PLATING	MATERIAL	COLOR	REMARK
1	10124-01226031-11R	Au1u"	PA66	BLACK	RhS

COMPLIANCE WITH THE REQUIREMENT  RhS  HF  SONY00259  OTHER  
 ※ NO USING RESTRICTED AND BANNED SUBSTANCE