
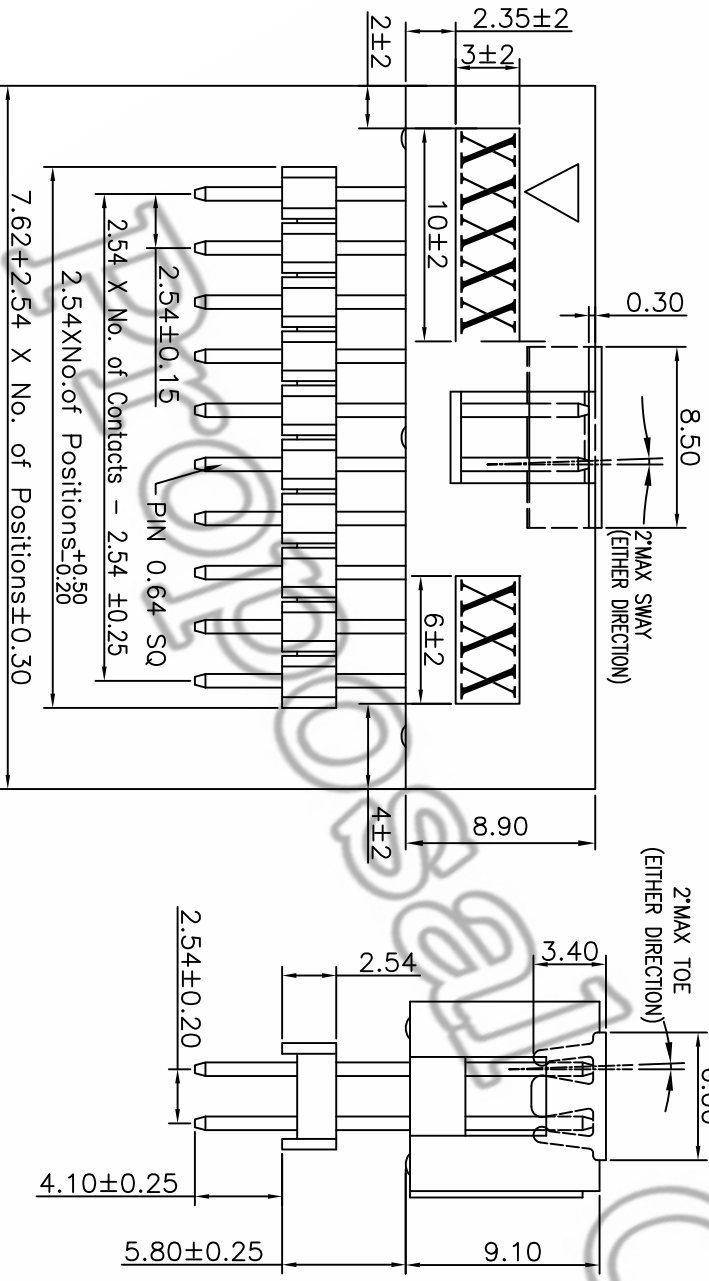


REV	ECN NO.	BY	DATE
A0	NEW DWG	Jacky Lv	11.11.15


CIR-	DIMENSION MM			
CUTS	L1	L2	L3	L4
2x3	5.08	15.24	12.84	7.62
2x4	7.62	17.78	15.38	10.16
2x5	10.16	20.32	17.92	12.70
2x10	22.86	33.02	30.62	25.40
2x13	30.48	40.64	38.24	33.02
2x15	35.56	45.72	43.32	38.10
2x20	48.26	58.42	56.02	50.80
2x25	60.96	71.12	68.72	63.50
2x30	73.66	83.82	81.42	76.20
2x32	78.74	88.90	86.50	81.28

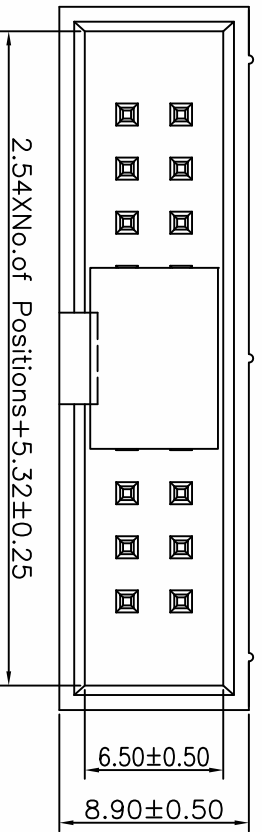

Ordering Information

TABLE

NO.	PART NO.	CIRCUITS	PLATING	REMARK
1	21110A-0110-16R	2*10 PIN	Au G/F	RoHS
2	21110B-0110-16R	2*13 PIN	Au G/F	RoHS
3	21110C-0110-16R	2*15 PIN	Au G/F	RoHS



RECOMMENDED P.C. BOARD LAYOUT
ALL TOLERANCE ARE ± 0.05

COMPLIANCE WITH THE REQUIREMENT RoHS HF SONYY00259 OTHER
* NO USING RESTRICTED AND BANNED SUBSTANCE

Dim.C	NOTE
6.00mm	03~08PIN
8.50mm	09~32PIN

CUSTOMER DRAWING	
-TOLERANCES-	
UNLESS OTHERWISE SPECIFIED	
X.X ± 0.35	X.X ± 3°
X.XX ± 0.25	X.XX ± 2°
X.XXX ± 0.15	X.XXX ± 1°

Lite Litecomm Co., Ltd.

TITLE: 2.54MM BOX+HEADER 180° DIP

DWG NO: 21110X-0110-XXR

DATE: 2011.11.15 SCALE: 1:1 UNIT: MM PAGE: 1/1

APPD: Anderson, Chiu
CHECK: Bill, Chen
DRAW: Jacky, Lv

NOTES:

- SPECIFICATIONS
CURRENT RATING: 3 AMP
INSULATION RESISTANCE: 5000M OHMS Min.
DIELECTRIC WITHSTANDING VOLTAGE: 600 VAC
CONTACT RESISTANCE: 20 MILLI OHMS Max.
OPERATING TEMPERATURE: -40°C~120°C (REF.)
CONTACT RETENTION FORCE: 0.50 KGf/PIN MIN
- MATERIALS
INSULATOR MATERIAL: PA6T, UL94V-0, COLOR: BLACK
CONTACT MATERIAL: BRASS
- FINISH
CONTACT: Au G/F PLATED OVERALL
- D/C CODE: XXXXXXXX
- PART NO.: 21110X-0110-X X R
 - 10A: 2*10PIN
 - 10B: 2*13PIN
 - 10C: 2*15PIN

LINE DAY WEEK YEAR

R: RoHS
HOUSING MATERIAL:
6. PA6T, COLOR: BLACK
PLATING:
1. CONTACT: Au G/F;