REV	ECN.NO:	BY	DATE
A0	NEW DWG	Emily	12.03.02

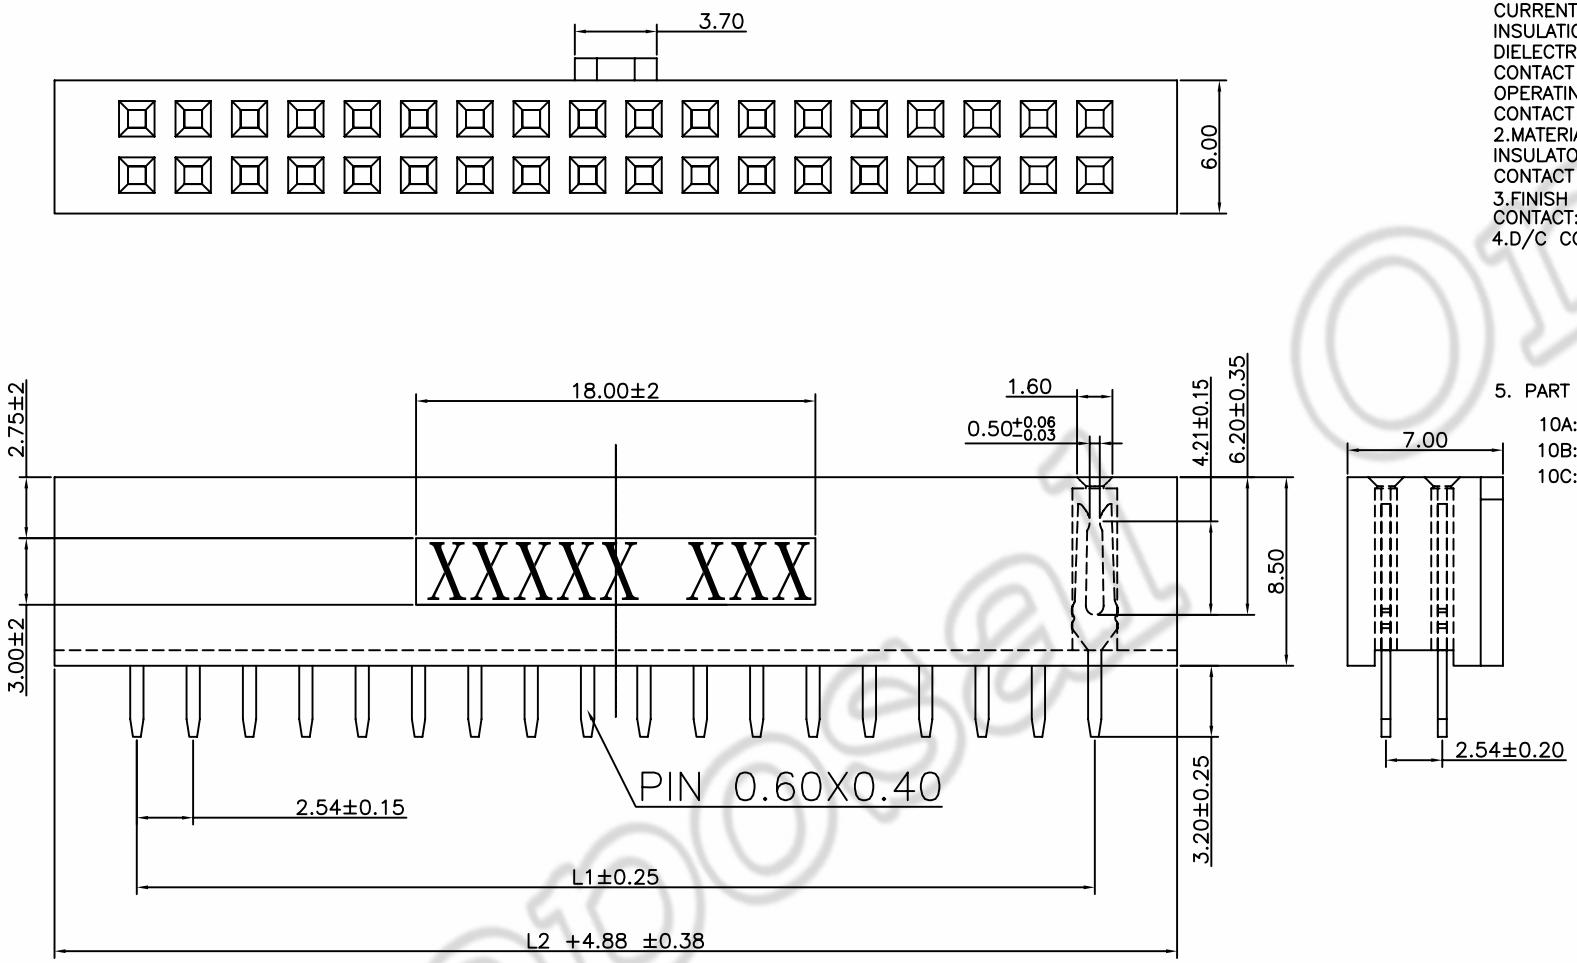

NOTES:
1.SPECIFICATIONS
CURRENT RATING: 3 AMP
INSULATION RESISTANCE: 5000M OHMS Min.
DIELECTRIC WITHSTANDING VOLTAGE: 600 VAC
CONTACT RESISTANCE: 20 MILLI OHMS Max.
OPERATING TEMPERATURE: −40°C~120°C (REF.)
CONTACT RETENTION FORCE: 0.50 KGF/PIN MIN
2.MATERIALS
INSULATOR MATERIAL: PA6T,UL94V−0,COLOR:BLACK
CONTACT MATERIAL: PHOSPHOR BRONZE
3.FINISH
CONTACT: Au G/F PLATED OVERALL
4.D/C CODE: XXXXXXXX
LINE
DAY
WEEK
YEAR

5. PART NO. :22110X−0110−X X R
10A: 2*10PIN
10B: 2*13PIN
10C: 2*15PIN
R: RoHS
HOUSING MATERIAL:
6. PA6T,COLOR: BLACK
PLATING:
1. CONTACT: Au G/F;

CIR-CUITS	DIMENSION MM L1	L2
2X2	2.54	5.08
2X3	5.08	7.62
2X4	7.62	10.16
2X5	10.16	12.70
2X10	22.86	25.40
2X13	30.48	33.02
2X15	35.56	38.10
2X20	48.26	50.80
2X30	73.66	76.20
2X40	99.06	101.60



RECOMMENDED P.C.BOARD LAYOUT
ALL TOLERANCE ARE:±0.05

TABLE

NO:	PART NO:	CIRCUITS	PLATING	REMARK
3	22110C−0110−16R	2*15 PIN	Au G/F	RoHS
2	22110B−0110−16R	2*13 PIN	Au G/F	RoHS
1	22110A−0110−16R	2*10 PIN	Au G/F	RoHS

COPLIANCE WITH THE REQUIEMENT ☑ RoHS ☐ HF ☐ SONY00259 ☐ OTHER
※ NO USING RESTRICTED AND BANNED SUBSTANCE

CUSTOMER DRAWING

−TOLERANCES−
UNLESS OTHERWISE SPECIFIED

X.X	±0.35	X.X°	±3°
X.XX	±0.25	X.XX°	±2°
X.XXX	±0.15	X.XXX°	±1°

Liteconn Co.,Ltd.

TITLE: 2.54MM 排母 180度 DIP

APPD:
CHECK:
DRAW: Emily

DWG NO: 22110X−0110−XXR

DATE	SCALE	UNIT	PAGE
2012.03.02	1:1	MM	1/1

Proposal Only